

## Dry Sprinkler Boot Pipe Flashing

R007A


The Dektite boot is a quicker and more efficient way of flashing dry pipe installations, to reduce the transfer of moist air into your freezer spaces. It helps to close the gap created by the clearance hole through a wall or ceiling during installation of a dry pipe sprinkler.

The boot also reduces the risk of cracking in comparison to commonly used sealants, which allows the passing of moist air.

The temperature differences between the inside and outside of the freezer can cause condensation. If the condensation is not controlled it causes ice, which may damage the dry pipe sprinkler or in the event of a fire will prevent proper operation.

### Product Features:

- Complies with NFPA 13 code changes.
- One piece construction making it quick and easy to install.
- Pipe diameter markings are clearly indented for accurate fitting
- Flexible construction which allows for 'movement' within the piping system.
- Eliminates the need for insulation or caulk around the dry sprinkler barrel.
- Reduces the risk of moisture ingress into the freezer area.
- EPDM has a continuous service temperature range of -51°C (-61°F) to +120°C (+250°F).
- Silicone has a continuous service temperature range of -40°C (-40°F) to +176°C (+350°F).

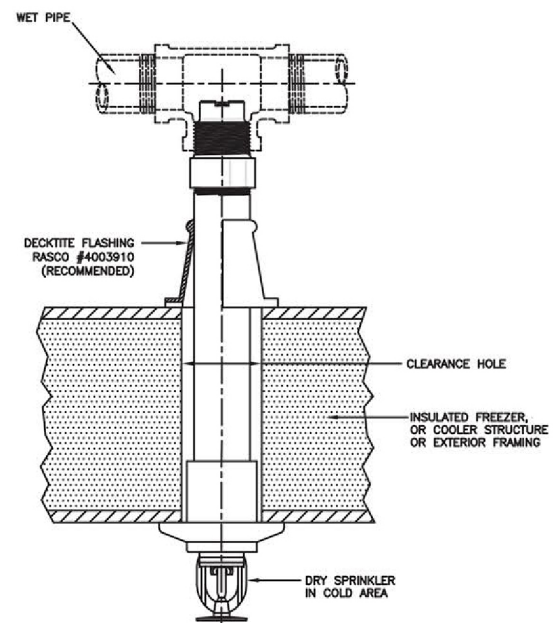

Part Number: 6990004858

Description	Model
1/4 x 2 Dektite boot #1	#4003910